



CONMIX LTD.

Building History

CONTXTRA Classicdeco

Elastomeric coating for classic finish

CONTXTRA Classicdeco is supplied as a ready to use decorative plaster. It consists of cross-linked acrylic co-polymer emulsion, additives and fine sized processed sand, that are stabilized by liquid based surfactants.

Recommended Substrates

Trowel applied decorative textured finish for internal and external application on concrete, plaster and hard wooden boards.

Main Features


- Good durability
- Washable and easy to maintain
- Alkali resistant
- Environmental friendly
- UV and water resistant
- Highly flexible with ability to bridge minor cracks
- Anti-bacterial and anti-fungal

Typical Properties

Colours	As per CONTXTRA shade card
Finish	Matt
Volume of solids (105 ^o c, 3 hours) *	48 ± 2%
Specific gravity at 25 ^o c * ASTMD1475	1.65 - 1.80 gm/cc
Theoretical coverage *	0.80 - 1.00 ltrs/ m ² @ 2 mm dry film thickness
Wet film thickness per coat	1.5 - 2.5 mm
Drying time at 25 ^o c	Tack free : 60 – 90 minutes Full cure : 7 days Physical or chemical change : Dries through loss of water

* Typical results under standard laboratory conditions.

Application Tools

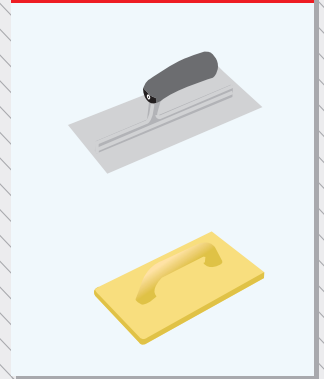

Packaging

18.9 ltrs. (5 US gallons) &
3.78 ltrs. (1 US gallon)

PMP/CD Ver.1 06/10

Application



Finishing



Final Texture



Surface Preparation

The surface to be coated must be free of dirt, loose particles, chemical impurities, oil and other contaminants. Loose particles to be removed by high pressure wash. If fungi are present, recommend to use a fungicidal wash. Leave for 24 hours, rinse and scrape clean. Wipe thoroughly with a damp cloth. In case of oil, grease or other contaminants, clean using a mild detergent or solvent and rinse thoroughly with fresh water to ensure complete removal of the contaminant and the detergent.

Mixing

Classicdeco has to be mixed thoroughly by means of a mechanical mixer prior to application.

Application

Prepared surface should be primed using one coat of CONTXTRA Primer, applied with roller or brush.

Classicdeco has to be applied between 6 to 24 hours of the application of the primer.

Classicdeco mixed as above is applied in a thin coat of 1.0 - 2.5 mm thickness to the primed surface. To avoid grinning, double back and fill out to a uniform thickness. Work from a wet unset edge to complete an entire unbroken panel area in one continuous operation. Level off edges with an aluminum straight edge. Steel and plastic trowels are used to achieve the required texture.

Conmix demonstration team will assist in these procedures upon request.

General Information

- Shelf life** : 12 months from date of production, if stored properly in original unopened packing in dry conditions away from sunlight and high temperatures.
- Cleaning** : Clean all equipments and tools with Conmix Cleaner/Water
- Health & safety** : Refer material safety data sheet



P.O. Box 5936, Sharjah, United Arab Emirates

Head Office: Tel: +971 6 5314155, Fax: +971 6 5314332 **Sales Office:** Te: +971 6 5682422, Fax: +971 6 5681442

e-mail: conmix@conmix.com **Website:** www.conmix.com

PMP/CD Ver.1 06/10

It is the customer's responsibility to satisfy themselves by checking with the company if the information is still current at the time of use. The customer must be satisfied that the product is suitable for the intended. All products comply with the properties shown on current data sheets. However, Conmix does not warrant or guarantee the installation of products as it does not have any control over installation or end use of product. All information and in particular the recommendations relating to application and end use are given in good faith. The products are guaranteed against any defect and are manufactured and sold to Conmix standard terms and conditions of sale.