

AISI 410


**62441**  
 DIN 7504 K - (similar ISO 15480)

**VIS AUTOPERCEUSES TETE HEXAGONALE A EMBASE**

HEXAGON HEAD WITH FLANGE SELF DRILLING SCREWS

SECHSKANTBOHRSCHRAUBEN MIT FLANSCH

TORNILLOS AUTOTALADRANTES CABEZA HEXAGONAL CON VALONA

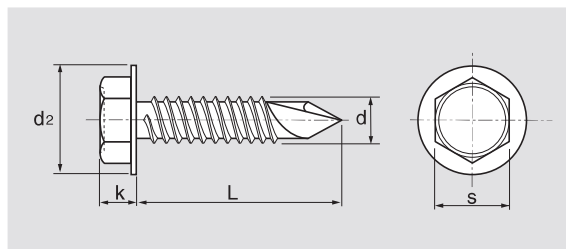

d	4,2 (8)	4,8 (10)	6,3 (14)
d2	8,8	10,5	13,2
k	4,10	4,30	5,90
s	7	8	10
Capacité de perçage	3	4	5

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
4,2X13	624414,2X13	200	0,194	4,8X50	624414,8X50	200	0,590
4,2X16	624414,2X16	200	0,221	6,3X19	624416,3X19	100	0,630
4,2X19	624414,2X19	200	0,236	6,3X25	624416,3X25	100	0,769
4,8X13	624414,8X13	200	0,257	6,3X32	624416,3X32	100	0,818
4,8X16	624414,8X16	200	0,291	6,3X38	624416,3X38	100	1,010
4,8X19	624414,8X19	200	0,299	6,3X50	624416,3X50	100	1,240
4,8X25	624414,8X25	200	0,377	6,3X60	624416,3X60	100	1,480
4,8X32	624414,8X32	200	0,453	6,3X70	624416,3X70	100	1,480
4,8X38	624414,8X38	200	0,500	6,3X80	624416,3X80	100	1,480



Perce l'acier / Drills steel

Aspect argent dû au traitement améliorant la tenue à la corrosion qui demeure inférieure à l'A2

Silver aspect due to treatment for enhancing corrosion resistance which is lower than A2

Informations d'utilisation voir page 43 / Using instructions : see page 43