

AISI 410


**62441**  
 DIN 7504 K - (similar ISO 15480)

**VIS AUTOPERCEUSES TETE HEXAGONALE A EMBASE**

HEXAGON HEAD WITH FLANGE SELF DRILLING SCREWS

SECHSKANTBOHRSCHRAUBEN MIT FLANSCH

TORNILLOS AUTOTALADRANTES CABEZA HEXAGONAL CON VALONA

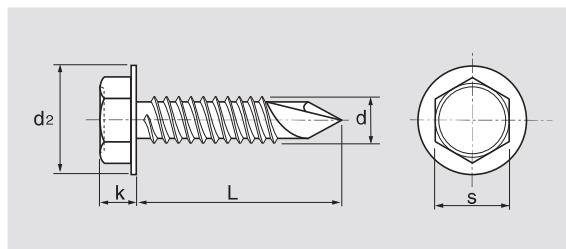

d	4,2 (8)	4,8 (10)	6,3 (14)
d2	8,8	10,5	13,2
k	4,10	4,30	5,90
s	7	8	10
Capacité de perçage	3	4	5

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
<b>4,2X13</b>	624414,2X13	200	0,194	<b>4,8X50</b>	624414,8X50	200	0,590
<b>4,2X16</b>	624414,2X16	200	0,221	<b>6,3X19</b>	624416,3X19	100	0,630
<b>4,2X19</b>	624414,2X19	200	0,236	<b>6,3X25</b>	624416,3X25	100	0,769
<b>4,8X13</b>	624414,8X13	200	0,257	<b>6,3X32</b>	624416,3X32	100	0,818
<b>4,8X16</b>	624414,8X16	200	0,291	<b>6,3X38</b>	624416,3X38	100	1,010
<b>4,8X19</b>	624414,8X19	200	0,299	<b>6,3X50</b>	624416,3X50	100	1,240
<b>4,8X25</b>	624414,8X25	200	0,377	<b>6,3X60</b>	624416,3X60	100	1,480
<b>4,8X32</b>	624414,8X32	200	0,453	<b>6,3X70</b>	624416,3X70	100	1,480
<b>4,8X38</b>	624414,8X38	200	0,500	<b>6,3X80</b>	624416,3X80	100	1,480



Perce l'acier / Drills steel

Aspect argent dû au traitement améliorant la tenue à la corrosion qui demeure inférieure à l'A2

Silver aspect due to treatment for enhancing corrosion resistance which is lower than A2

Informations d'utilisation voir page 43 / Using instructions : see page 43