


Inox A2

62 429
DIN 7504 M - (similar ISO 15481)
VIS AUTOPERCEUSES TETE CYLINDRIQUE PHILLIPS

PHILLIPS PAN HEAD SELF DRILLING SCREWS

BOHRSCHRAUBEN MIT LINSENKOPF UND KREUZSCHLITZ H

TORNILLOS AUTOTALADRANTES CABEZA CILINDRICA PHILLIPS

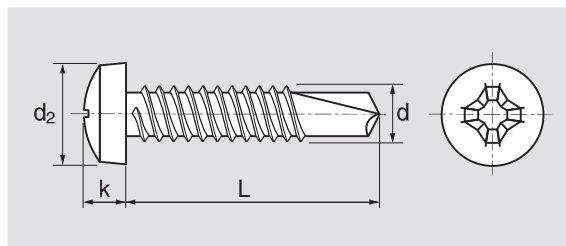

| d | 3,5 (6) | 3,9 (7) | 4,2 (8) | 4,8 (10) |
|---------------------|---------|---------|---------|----------|
| d2 | 6,9 | 7,5 | 8,2 | 9,5 |
| k | 2,6 | 2,8 | 3,05 | 3,55 |
| ⊕ | 2 | 2 | 2 | 2 |
| Capacité de perçage | 2 | 2 | 3 | 4 |

| d x L | Code | Cond. | kg/100 | d x L | Code | Cond. | kg/100 |
|---------|--------------|-------|--------|--------|-------------|-------|--------|
| 3,5X9,5 | 624293,5X9,5 | 200 | 0,104 | 4,2X16 | 624294,2X16 | 200 | 0,170 |
| 3,5X13 | 624293,5X13 | 200 | 0,119 | 4,2X19 | 624294,2X19 | 200 | 0,220 |
| 3,5X16 | 624293,5X16 | 200 | 0,132 | 4,2X25 | 624294,2X25 | 200 | 0,257 |
| 3,5X19 | 624293,5X19 | 200 | 0,144 | 4,2X32 | 624294,2X32 | 200 | 0,306 |
| 3,5X25 | 624293,5X25 | 200 | 0,170 | 4,2X38 | 624294,2X38 | 200 | 0,339 |
| 3,5X28 | 624293,5X28 | 200 | 0,183 | 4,8X16 | 624294,8X16 | 200 | 0,310 |
| 3,5X32 | 624293,5X32 | 200 | 0,200 | 4,8X19 | 624294,8X19 | 200 | 0,335 |
| 3,5X38 | 624293,5X38 | 200 | 0,225 | 4,8X25 | 624294,8X25 | 200 | 0,384 |
| 3,9X13 | 624293,9X13 | 200 | 0,136 | 4,8X32 | 624294,8X32 | 200 | 0,391 |
| 3,9X16 | 624293,9X16 | 200 | 0,160 | 4,8X38 | 624294,8X38 | 200 | 0,491 |
| 3,9X19 | 624293,9X19 | 200 | 0,178 | 4,8X45 | 624294,8X45 | 200 | 0,548 |
| 3,9X22 | 624293,9X22 | 200 | 0,200 | 4,8X50 | 624294,8X50 | 200 | 0,589 |
| 3,9X25 | 624293,9X25 | 200 | 0,208 | 4,8X60 | 624294,8X60 | 200 | 0,671 |
| 3,9X32 | 624293,9X32 | 200 | 0,235 | 4,8X70 | 624294,8X70 | 200 | 0,754 |
| 3,9X38 | 624293,9X38 | 200 | 0,267 | 4,8X80 | 624294,8X80 | 200 | 0,836 |
| 4,2X13 | 624294,2X13 | 200 | 0,183 | | | | |



Perce seulement l'aluminium / Drills only aluminium
 Informations d'utilisation voir page 43 / Using instructions : see page 43