


Product data sheet

Characteristics

47363

MX opening voltage release for fixed Masterpact NT/NW, 200 VDC to 250 VDC, 200 VAC to 250 VAC 50/60 Hz

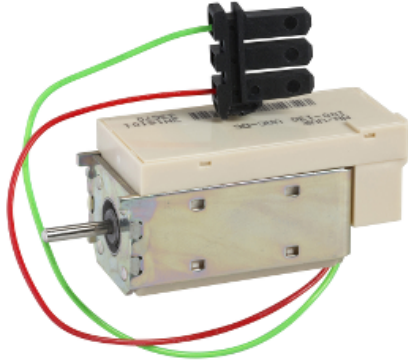

Main

Device short name	MX
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact NT Masterpact NW
Voltage release type	Shunt trip release
[Uc] control circuit voltage	200...250 V AC 50/60 Hz 200...250 V DC

Complementary

Threshold tripping voltage	0.7...1.1 Un
Supply holding power	4.5 VA
Mounting mode	Fixed
Response time	50 ms

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	173 g
Package 1 Height	5 cm
Package 1 width	6 cm
Package 1 Length	8.5 cm

Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information

Contractual warranty

Warranty	18 months
----------	-----------
