


Medium Duty PVC Suction Hose



Flexible PVC Tube

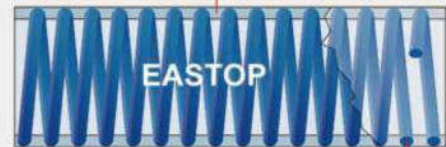

Spiral PVC Reinforcement

- Transparent PVC layer will enable better visibility of flowing material inside
- Transparent construction allows visual of materials flow
- Working Temperature: -5°C to +65°C

Application :

Reinforced with rigid PVC helix, mainly suitable for conveying and suction of water, oil, powder, granules in pump industries, constructions, mining, marine and other applications.

Specification !

PRODUCT CODE	ID		OD	WP		BP		W/A	COIL
	inch	mm	mm	bar	psi	bar	psi	g/m	m
ET-SHMD-019	3/4	19	23	6	90	18	270	230	30
ET-SHMD-025	1	25	29	6	90	18	270	290	30
ET-SHMD-032	1-1/4	32	38	6	90	18	270	400	30
ET-SHMD-038	1-1/2	38	46	6	90	18	270	650	30
ET-SHMD-050	2	50	56	5	75	15	225	700	30
ET-SHMD-063	2-1/2	63	71	4	60	12	180	1170	30
ET-SHMD-075	3	75	83	3	45	9	135	1300	30
ET-SHMD-100	4	100	110	3	45	9	135	2300	30
ET-SHMD-125	5	125	137	3	45	9	135	3300	20
ET-SHMD-152	6	152	166	2	30	6	90	5500	10
ET-SHMD-200	8	200	214	2	30	6	90	6300	10
ET-SHMD-254	10	254	270	2	30	6	90	10000	10
ET-SHMD-305	12	305	329	2	30	6	90	18000	10
ET-SHMD-358	14	358	382	2	30	6	90	20000	10
ET-SHMD-408	16	408	432	2	30	6	90	23000	10

