


# Connectors

Connectors are an important element of a fall arrest system. They form an integral part of the lanyard. Connectors should be in accordance with EN 362 and should be CE approved.

Picture	Part Number	Product	Material	Breaking strength	Opening	Length
	<b>AS963</b>	16mm Rope Grab	Steel	3300 lbs	20 mm Eye	-
	<b>CT15</b>	Carabineer	Steel	5000 lbs	15 mm	108 mm
	<b>CT15+</b>	Carabineer	Steel	5500 lbs	15 mm	108 mm
	<b>CT20</b>	Double Snap Hook	Steel	5500 lbs	20 mm	133 mm
	<b>CT25</b>	Twist Lock Hook	Light Alloy	5500 lbs	25 mm	122 mm
	<b>KA25</b>	Safety Hook	Light Alloy	5000 lbs	25 mm	135 mm
	<b>CT60</b>	Rebar Snap Hook	Steel	5000 lbs	60 mm	215 mm
	<b>CT140</b>	Anchor Hook	Stainless Steel	5000 lbs	140 mm	430 mm

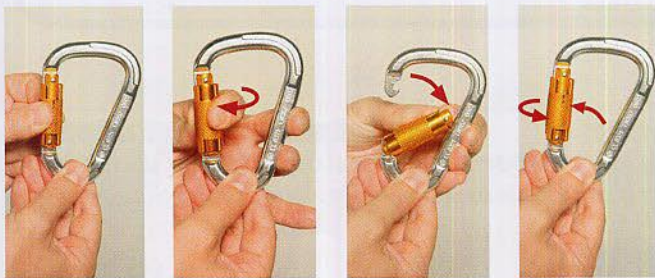


## How to use CT25?

*CT25 Hook locks itself automatically upon release after opening*

## How to use CT60?

*With CT60 you can directly hook on to a scaffolding*

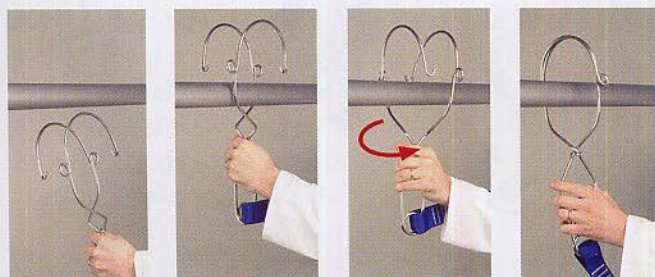

## How to use CT140?

*CT140 can be used on pipes up to 140 mm diameter*

