


Slings to EN 1492-1

We also manufacture Double Ply slings as per European Norm, EN 1492 – 1 with a Safety Factor of 7:1. The colour of the webbing indicates the Safe Working Load / Working Load Limit of the sling. We have two programmes for this type of slings based on the webbing width.

Flat Polyester Sling type IE (webbing width in inch)

Webbing from West Europe
(without black lines)
Safety factor 7:1

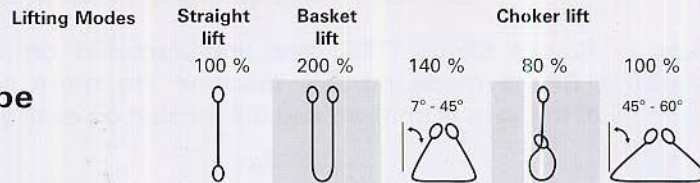

Ref.	SWL / WLL	Width	Colour	SWL / WLL in kg at different modes				
IE1	1 T	1"	VIOLET	1000	2000	1400	800	1000
IE2	2 T	2"	GREEN	2000	4000	2800	1600	2000
IE3	3 T	3"	YELLOW	3000	6000	4200	2400	3000
IE4	4 T	4"	GREY	4000	8000	5600	3200	4000
IE5	5 T	5"	RED	5000	10000	7000	4000	5000
IE6	6 T	6"	BROWN	6000	12000	8400	4800	6000
IE8	8 T	8"	BLUE	8000	16000	11200	6400	8000
IE10	10 T	10"	ORANGE	10000	20000	14000	8000	10000
IE12	12 T	12"	ORANGE	12000	24000	16800	9600	12000

Flat Polyester Sling type ME (webbing width in mm)

Webbing from West Europe
(with black lines)
Safety factor 7:1

Ref.	SWL / WLL	Width	Colour	SWL / WLL in kg at different modes				
ME1	1 T	30 mm	VIOLET	1000	2000	1400	800	1000
ME2	2 T	60 mm	GREEN	2000	4000	2800	1600	2000
ME3	3 T	90 mm	YELLOW	3000	6000	4200	2400	3000
ME4	4 T	120 mm	GREY	4000	8000	5600	3200	4000
ME5	5 T	150 mm	RED	5000	10000	7000	4000	5000
ME6	6 T	180 mm	BROWN	6000	12000	8400	4800	6000
ME8	8 T	240 mm	BLUE	8000	16000	11200	6400	8000
ME10	10 T	300 mm	ORANGE	10000	20000	14000	8000	10000




In addition to the colour, the number of black lines on these slings indicates its SWL /WLL.



ME3 Sling (3T)

(3 Black Lines)

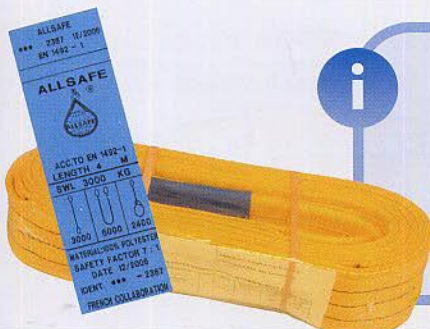

- Lifting slings are shrink packed.
- Each sling is supplied with a certificate.
- Identification tag is provided on each sling as per the requirements of EN standard.
- All slings can be provided with protective sleeves of any length.
- Always follow good slinging practice.

