



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
IIUMINACION SOLAR



ŠÖÖŠAMP	ÚT ÖGÍ HÍ ÁGÉÚŠ ÁREY Á HEEĒ Ē Í ĒĒ
ÜÖLARÁJANEL	JXÁ Y ÁJ []
ÖATTERYÁYPE	Šááá (ĒĒ) Á Ē XÁĒĒ ÖĒ
ÖHARGINGÁIME	Ī Ē Á [] •
ÖISCHARGING TIME	ÖĒĒ Á [] •
ŠUMEN	FGEÁ Ē
T ATERIAL	ÚÓ (Lamp arm included)
ÖINSTALLÁEIGHT	ÖĒ {
NET DIMENSIONS	ÖĪ Ē Ē Ī Ē Ē Ī { {

WSLZ919



Solar LED Wall Light 9W 14W



ŠÖÖŠAMP	4ĒÚŠ ÁREY Á HEEĒ Ē Í ĒĒ
ÜÖLARÁJANEL	8.5XÁY ÁJ []
ÖATTERYÁYPE	Šááá (ĒĒ) Á Ē XÁĒĒ ÖĒ
ÖHARGINGÁIME	Ī Ē Á [] •
ÖISCHARGING TIME	ÖĒĒ Á [] •
ŠUMEN	FGEÁ Ē
T ATERIAL	ÚÓ (Lamp arm included)
ÖINSTALLÁEIGHT	3Ē {
NET DIMENSIONS	372Ē Ē 77Ē Ē Ī { {

WSLZ1419

Easy to install and use
Secure and reliable
High - light LED chip
Human sensor



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
ILUMINACION SOLAR



ŠÖÖŠAMP	40W LED 6000k-6500k
ÜÖLARÁJANEL	16X29Y ÁM[no
ÖATTERYÁYPE	LiFePO4Á2.8XÁ80@
ÖHARGINGÁIME	Í È Á['•
ÖISCHARGING TIME	3ÈÈ6Á['•
ŠUMEN	F6ÈÁ[Ø
T ATERIAL	Die-Casting Aluminium
ÖINSTALLÁEIGHT	4È{
NET DIMENSIONS	740Á840Á82{ {

WSLZA4019



ŠÖÖŠAMP	6ÈY LEDÁ 6ÈÈÈ È Í ÈÈ
ÜÖLARÁJANEL	16X86Y ÁMono
ÖATTERYÁYPE	ŠFePO4Á2.8XÁ24@
ÖHARGINGÁIME	Í È Á['•
ÖISCHARGING TIME	3ÈÈ6Á['•
ŠUMEN	F6ÈÁ[Ø
T ATERIAL	Die-Casting Aluminium
ÖINSTALLÁEIGHT	5È{
NET DIMENSIONS	860Á840Á82{ {

WSLZA6019

SOLAR LED STREET LIGHT

(Adjustable angle)



ŠÖÖŠAMP	100W LED 6000k-6500k
ÜÖLARÁJANEL	16XÁ8Y ÁM[no
ÖATTERYÁYPE	LiFePO4Á2.8XÁ20@
ÖHARGINGÁIME	Í È Á['•
ÖISCHARGING TIME	3ÈÈ6Á['•
ŠUMEN	F6ÈÁ[Ø
T ATERIAL	Die-Casting Aluminium
ÖINSTALLÁEIGHT	6È{
NET DIMENSIONS	980Á860Á125{ {

WSLZA10019

High-quality lithium battery
Adjustable angle
Waterproof technology



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
IIUMINACION SOLAR



ŠÖÖŠAMP	90W LED 3000k-6500k
ÜÖLARÁJANEL	6XÁ1Y ÁJ[]
ÓATTERYÁYPE	LiFePO4 3.2XÁ800
ÖHARGINGÁIME	1 Á Á []
ÖISCHARGING TIME	30-36 Á []
ŠUMEN	F6EÁ []
T ATERIAL	ABS
ÖINSTALLÁEIGHT	5E[]
NET DIMENSIONS	645Á250Á65[]

WSLZ9019



Waterproof & Heatproof



IP65
Waterproof



Anti
Electric



Human Sensor



ŠÖÖŠAMP	120Y LEDÁ 6000 Á 6500
ÜÖLARÁJANEL	6XÁ8Y ÁJ[]
ÓATTERYÁYPE	ŠiFePO4 3.2XÁ800
ÖHARGINGÁIME	1 Á Á []
ÖISCHARGING TIME	30-36 Á []
ŠUMEN	F6EÁ []
T ATERIAL	ABS
ÖINSTALLÁEIGHT	5E[]
NET DIMENSIONS	750Á250Á65[]

WSSLZ12019



WESTPOINT®
Create emotions




SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
IIUMINACION SOLAR

ŠÖÖŠAMP	6000k-6500k 120W
ÜÖLÄRÄJÄNEL	10XÄ2Y ÄPoly
ÖÄTTERYÄYPE	LiFePO4 6.4V 18AH
ÖHÄRGÄNGÄIME	1 ÄÄÄ ["] •
ÖISCHÄRGÄNG TIME	20Ä24ÄÄ ["] •
ŠÜMEN	160 [[Ä
TÄTERIAL	Aluminium
ÖÄSTALLÄPEIGHT	6-8 [
NET DIMENSIONS	Height : 701 mm Width : 220 mm Depth : 118 [[

WSLZ12021

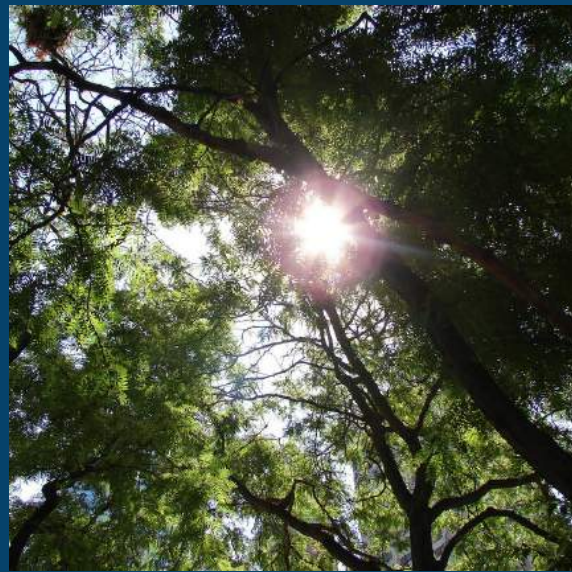

Waterproof Technology
Adjustable Angle
Aluminum Alloy Structure

CE CB



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
ILUMINACION SOLAR



ŠÖÖŠAMP	150W LED 6000k-6500k
ÜÖLÄRÄÜÄNEL	6XÄ2Y ÄÜ[]
ÖÄTTERYÄÝPE	LiFePO4Ä.2XÄ.80Ä
ÖHÄRGINÄÝME	1 Ä Ä[]
ÖISCHÄRGINÄ TIME	3Ä6ÄÄ[]
ŠÜMEN	F6ÄÄ Ä
TÄTERIAL	ABS
ÄINSTALLÄÄEIGHT	5ÄÄ[]
NET DIMENSIONS	838ÄÄ250ÄÄ65Ä[]

WSLZ15019

Highlight



Automatic charging during the day

long life



Automatically lit at night



Die Cast Aluminum
Waterproof technology
Lithium-ion battery



ŠÖÖŠAMP	12Y LEDÄ 6ÄÄÄ Ä ÄÄÄ
ÜÖLÄRÄÜÄNEL	15XÄ2Y ÄÜ[]
ÖÄTTERYÄÝPE	ŠÄhium-IonÄ.1.1XÄ.80Ä
ÖHÄRGINÄÝME	1 Ä Ä[]
ÖISCHÄRGINÄ TIME	8-12ÄÄ[]
ŠÜMEN	F2ÄÄ Ä
TÄTERIAL	Aluminum Alloy
ÄINSTALLÄÄEIGHT	3ÄÄ[]
NET DIMENSIONS	495ÄÄ250ÄÄ15Ä[]

WSSLZ1219



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT


ECLAIRAGE SOLAIRE

IIUMINACION SOLAR



ŞÖÖŞAMP	6000k-6500k 100W
ÜÖLARÁJANEL	16X48Y ÁMono
ÓATTERYÁYPE	LiFePO4 12.8V 42AH
ÔHARGINGÁVME	1 Ē Ą [] •
ÔISCHARGING TIME	30 Ē6 Ą [] •
ŞUMEN	160 [] Ē
T ATERIAL	Aluminium
QINSTALLÁPEIGHT	7-10 {
NET DIMENSIONS	Height : 980 mm Width : 360 mm Depth : 125 { {

WSLZ10020AR



IP65



Waterproof Technology
Adjustable Angle
Aluminum Alloy Structure

CE CB RoHS



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE

IIUMINACION SOLAR



ŠÖÖ&	Osram 5050LED40Y Á 6000k-6500\
ÜOLARÁÚANEL	Mono-Crystalline 16V
ÔHARGINGÁVIME	Î È Á[]•
ÖSCHARGING TIME	30È6Á[]•
ŠUMEN	F60Á È
T ATERIAL	Aluminium Alloy
ØSTALLÁPEIGHT	5-7{
NET DIMENSIONS	Height : 85mm Width : 340mm Depth : 650{ {

WSLZ4020AR



Waterproof Technology
Adjustable Angle
Aluminum Alloy Structure



RoHS



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
IIUMINACION SOLAR



ŠÖÖŠAMP	6000k-6500k 40W
ÜÖLARÁJANEL	16XÁ9Y ÁMono
ÓATTERYÁYPE	LiFePO4 12V 18AH
ÔHARGINGÁIME	Ī Ē Á["]•
ÖISCHARGING TIME	30Ē6Á["]•
ŠUMEN	160 [Ć]
T ATERIAL	Aluminium
ŒINSTALLÁPEIGHT	5-7 {
NET DIMENSIONS	Height : 260 mm Width : 330 mm Depth : 85 { {

WSLZ4020AR



CE RoHS



ŠÖÖŠAMP	6000k-6500k 60W
ÜÖLARÁJANEL	16XÁ6Y ÁMono
ÓATTERYÁYPE	LiFePO4 12V 24AH
ÔHARGINGÁIME	Ī Ē Á["]•
ÖISCHARGING TIME	30Ē6Á["]•
ŠUMEN	160 [Ć]
T ATERIAL	Aluminium
ŒINSTALLÁPEIGHT	5-7 {
NET DIMENSIONS	Height : 860 mm Width : 3540 mm Depth : 110 { {

WSLZ6020AR

Waterproof Technology
Adjustable Angle
Aluminum Alloy Structure

CE CB RoHS



WESTPOINT®
Create emotions




SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
IIUMINACION SOLAR

ŠÖÖŠAMP	6000k-6500k 60W
ÜOLARÁJANEL	60XÁ8Y ÁPoly
ÓATTERYÁYPE	LiFePO4 12.8V 36AH
ÖHARGINGÁIME	Í È Á [] •
ÖSCHARGING TIME	30 È 6 Á [] •
ŠUMEN	160 [[]
T ATERIAL	Aluminium
ÖSTALLÁPEIGHT	4-6 []
NET DIMENSIONS	Height : 13000 mm Width : 920 mm Depth : 670 [[]

WSSLZ4019

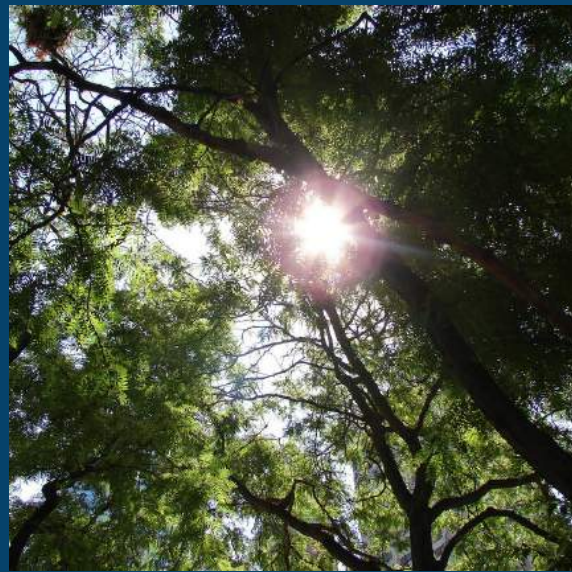

Waterproof Technology
Adjustable Angle
Aluminum Alloy Structure

CE CB RoHS



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE

IIUMINACION SOLAR



COLOUR TEMPERATURE	6000k-6500k 35W
SOLAR PANEL	9X42Y Poly
BATTERY TYPE	Lithium-ion 7.4V 12AH
CHARGING TIME	12 HOURS
DISCHARGING TIME	20-24 HOURS
LUMEN	160 LM
MATERIAL	Aluminium
INSTALL HEIGHT	3-5 M
NET DIMENSIONS	Height : 730 mm Width : 270 mm Depth : 60 mm

WSSLZ3520



Waterproof Technology
Adjustable Angle
Aluminum Alloy Structure

CE CB RoHS



WESTPOINT®
Create emotions



SOLAR


SOLAR LIGHT

ECLAIRAGE SOLAIRE
IIUMINACION SOLAR



ŠÖÖŠAMP	ÚT ÖGÍ HÍ Á 8 ÚŠ ÁŠ.6Y 6€€€ € í €€
ÜOLARÁJANEL	5.5XÁ.8Y ÁJ[]
ÖATTERYÁYPE	Šá€€ (€€) ÁŠXÁ€€@
ÖHARGINGÁIME	í Ĩ Á [] •
ÖISCHARGING TIME	12Ĥ5Á [] •
ŠUMEN	F6€Á Ĩ
T ATERIAL	Aluminum+PC
ÖNSTALLÁPEIGHT	3Ĥ {
NET DIMENSIONS	152Á Á 50Á Á 58 { {

WSLZ0319

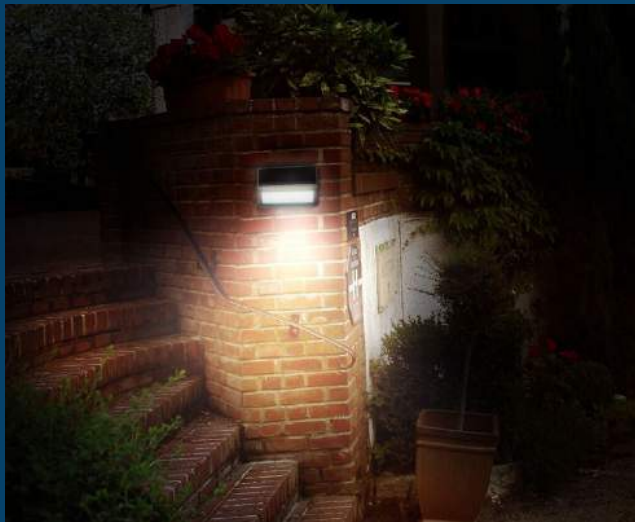

ŠÖÖŠAMP	SMD2835 30Pcs 6W 6€€€ € í €€
ÜOLARÁJANEL	5.5XÁY ÁJ[]
ÖATTERYÁYPE	Šá€€ (€€) ÁŠXÁ€€@
ÖHARGINGÁIME	í Ĩ Á [] •
ÖISCHARGING TIME	12Ĥ5Á [] •
ŠUMEN	F6€Á Ĩ
T ATERIAL	Aluminum+ÜÖ
ÖNSTALLÁPEIGHT	3Ĥ {
NET DIMENSIONS	235Á Á 50Á Á 58 { {

WSLZ0519

Integrated Design
Solar Powered
No wire needed
Easy installation



WESTPOINT
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE


IUMINACION SOLAR



ŠŔÖŔŠAMP	6000k-6500k 3W
ÜÖLARÁÜANEL	5.5XÁ.8Y ÁÜ[]'
ÓÄTTERYÁYYPE	Lithium-Ion 3.7V 2AH
ÖHARGINGÁ/IME	Ħ Ę Ą[]'
ÖISCHARGING TIME	20Ę4Ą[]'
ŠÜMEN	120[Ę]
T ATERIAL	Aluminium
ŦSTALLĄEIGHT	2-4[]
NET DIMENSIONS	Height : 152mm Width : 150mm Depth : 58[]



WSLZ0321

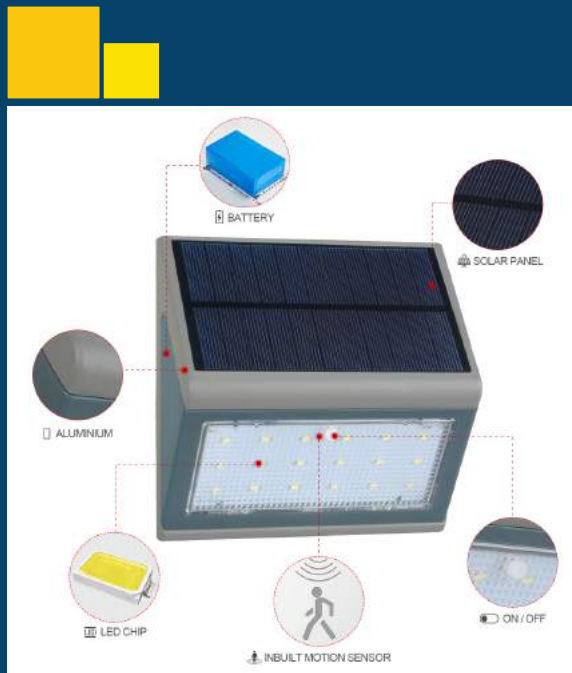

ŠŔÖŔŠAMP	6000k-6500k 5W
ÜÖLARÁÜANEL	5.5XÁY ÁÜ[]'
ÓÄTTERYÁYYPE	Lithium-Ion 3.7V 4AH
ÖHARGINGÁ/IME	Ħ Ę Ą[]'
ÖISCHARGING TIME	20Ę4Ą[]'
ŠÜMEN	120[Ę]
T ATERIAL	Aluminium
ŦSTALLĄEIGHT	2-4[]
NET DIMENSIONS	Height : 235mm Width : 150mm Depth : 58[]



WSLZ0521

Working Time 12-15 Hours
Motion Sensor
Aluminum Alloy Structure
Protection Rating IP65



RoHS



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
ILUMINACION SOLAR



COLOUR TEMPERATURE	6000k-6500k 100W
SOLAR PANEL	5.5X3.4Y Mono
BATTERY TYPE	Lithium-ion 3.7V 4.8AH
CHARGING TIME	12 HOURS
DISCHARGING TIME	20-24 HOURS
LUMEN	160 LM
MATERIAL	Plastic
INSTALL HEIGHT	2-4 FT
NET DIMENSIONS	Height : 213 mm Width : 179 mm Depth : 112 mm

WSLZ821



Integrated Design
Solar Powered
No Wire Needed
Easy installation





WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
IIUMINACION SOLAR



ŠÖÖŠAMP	30W LED 6000k-6500k
ÜOLARÁJANEL	15XÁ2Y ÁÚ[]
ÓATTERYÁYPE	Lithium-IonÁ 1.1XÁ.80E@
ÖHARGINGÁIME	Î È Á[]•
ÖISCHARGING TIME	10È 2Á[]•
ŠUMEN	F2EÁ[]
T ATERIAL	Die-casting Aluminum Alloy
ÖINSTALLÁEIGHT	4È[]
NET DIMENSIONS	232 ¢ 195 xÁ67[] {

WSFLZ3019



**Waterproof technology
Excellent heat dissipation**



ŠÖÖŠAMP	50Y LEDÁ 6E€E È Í E€E
ÜOLARÁJANEL	15XÁ2Y ÁÚ[]
ÓATTERYÁYPE	Šáhium-IonÁ 1.1XÁ.60E@
ÖHARGINGÁIME	Î È Á[]•
ÖISCHARGING TIME	10-12Á[]•
ŠUMEN	F2EÁ[]
T ATERIAL	Die-casting Aluminum Alloy
ÖINSTALLÁEIGHT	5È[]
NET DIMENSIONS	280ÁÁ230ÁÁ61[] {

WSFLZ5019



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
IIUMINACION SOLAR



ŠÖÖŠAMP	12W LED 6000k-6500k
ÜOLARÁJANEL	6XŠY ÁJ[]
ÓATTERYÁYPE	Lithium-IonÁ.7XÁ.8000
ÔHARGINGÁIME	Î È Á[] •
ÖISCHARGING TIME	10È2Á[] •
ŠUMEN	F2€Á[]
T ATERIAL	ABS+PC
QINSTALLÁEIGHT	3È[]
NET DIMENSIONS	O 200 €Á7[]

WSLZ1219




ŠÖÖŠAMP	20Y LEDÁ 6€€€ È [] €€
ÜOLARÁJANEL	15XŠY ÁJ[]
ÓATTERYÁYPE	Šáhium-IonÁ1.1XÁ.4000
ÔHARGINGÁIME	Î È Á[] •
ÖISCHARGING TIME	10-12Á[] •
ŠUMEN	F2€Á[]
T ATERIAL	Die-casting Aluminum
QINSTALLÁEIGHT	3È[]
NET DIMENSIONS	208ÁÁ76ÁÁ55[]

WSFLZ2019

High Power, high lumen, high quality
Easy to install and use



WESTPOINT®
Create emotions



SOLAR


SOLAR LIGHT

ECLAIRAGE SOLAIRE
IIUMINACION SOLAR



ŠÖÖŠAMP	100W LED 6000k-6500k
ÜOLARÁJANEL	15XÁ2Y ÁJ[]
ÓATTERYÁYPE	Lithium-IonÁ 1.1XÁ5.6Ö@
ÖHARGINGÁIME	í ě Á[] •
ÖISCHARGING TIME	10Ě2Á[] •
ŠUMEN	F6€Á Ę
T ATERIAL	Die-casting Aluminum Alloy
ÖSTALLÁPEIGHT	8Ě{
NET DIMENSIONS	328 € 280 xÁ0{ {

WSFLZ10019



Efficient heat dissipation




MULTIFUNCTIONAL	LED LIGHT/FM RADIO
ÜOLARÁJANEL	9XÁY ÁJ[]
ÓATTERYÁYPE	Šead-acid 6XÁ.5Ö@
ÖHARGINGÁIME	í ě Á[] •
ÖISCHARGING TIME	12-15Á[] •
ŠED	F6€Á Ę
T ATERIAL	ABS
IP CODE	IP65
NET DIMENSIONS	280Á230Á11{ {

Multifunctional solar emergency light
IP65 portable
USB charging
FM Radio



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT


ECLAIRAGE SOLAIRE

IIUMINACION SOLAR



ŠÖÖŠAMP	SMD5730Á 6000k-6500k
ÜOLARÁJANEL	9XÁ00Y ÁJ[]
ÓATTERYÁYPE	LiFePO4 6.4V 18AH
ÖHARGINGÁIME	Î È Á[]•
ÖISCHARGING TIME	10È 2Á[]•
ŠUMEN	F6EÁ Ę
T ATERIAL	Aluminum
ÖINSTALLÁEIGHT	5-8 {
NET DIMENSIONS	Height : 255mm Width : 330mm Depth : 85{ {

WSFLZ10021

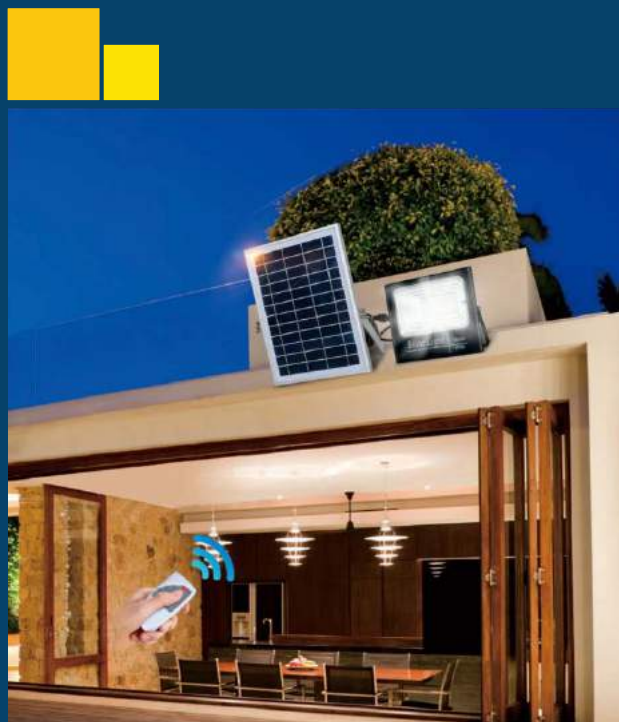

Light Sensor
Energy-saving and Eco-friendly
Aluminum Structure

CE CB RoHS



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE

IIUMINACION SOLAR



COLOUR TEMPERATURE	6000k-6500k 150W
SOLAR PANEL	18X30Y Á []
BATTERY TYPE	LiFePO4 12V 24AH
CHARGING TIME	1 8 2 P []
DISCHARGING TIME	10 8 2 P []
BEAM ANGLE	F6 6 Á []
MATERIAL	Aluminum
INSTALLATION HEIGHT	4-6 {
NET DIMENSIONS	Height : 360mm Width : 285mm Depth : 93 {

WSFLZ15021



Smart Light Sensor
Energy Saving
Aluminum Structure

CE CB RoHS



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT


ECLAIRAGE SOLAIRE

IIUMINACION SOLAR



COLOUR TEMPERATURE	6000k-6500k 200W
SOLAR PANEL	18X60Y Å []
BATTERY TYPE	LiFePO4 12V 18AH
CHARGING TIME	1 8 Å []
DISCHARGING TIME	10 8 2 Å []
BEAM ANGLE	F6 Å []
MATERIAL	Aluminum
INSTALLATION HEIGHT	5-8 {
NET DIMENSIONS	Height : 400mm Width : 325mm Depth : 108{ {

WSFLZ20021

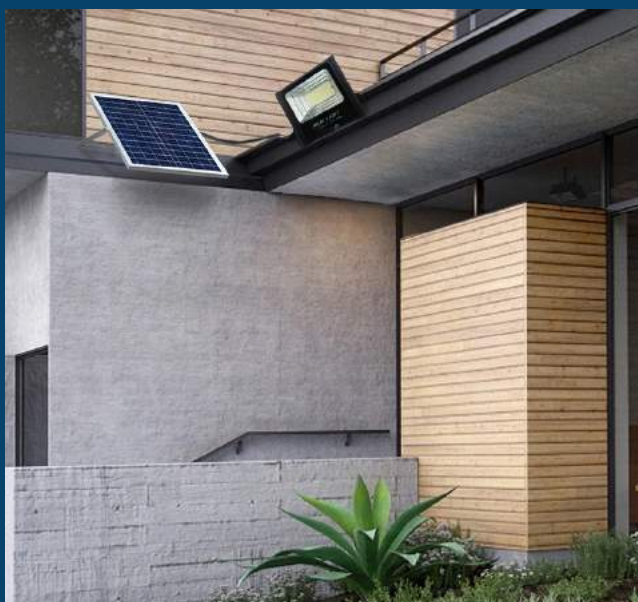

Smart Light Sensor
Energy Saving
Aluminum Structure

CE CB RoHS



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE

IIUMINACION SOLAR



ŠOOŠAMP	6000k-6500k 300W
ÜÖLARÁÚANEL	6X65Y ÁÚ[]
ÓATTERYÁYPE	LiFePO4 12V 96AH
ÔHARGINGÁ/IME	1 È Á[] •
ÖISCHARGING TIME	10 È 2 Á[] •
ŠUMEN	F6€Á[] Đ
T ATERIAL	Aluminum
ÖINSTALLÁPEIGHT	5-8 {
NET DIMENSIONS	Height : 436mm Width : 395mm Depth : 124{ {

WSFLZ30021



Smart Light Sensor
Energy Saving
Aluminum Structure

CE CB RoHS



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE

IIUMINACION SOLAR



ŠÖÖŠAMP	6000k-6500k 150W
ÜÖLARÁJANEL	6XÁ 1.5Y ÁJ[]
ÖATTERYÁYPE	LiFePO4 3.2V 24AH
ÖHARGINGÁIME	Î È Á[]
ÖISCHARGING TIME	20È4Á[]
ŠUMEN	F6ÈÁ È
T ATERIAL	Aluminum
ÖINSTALLÁEIGHT	4-7 {
NET DIMENSIONS	Height : 630mm Width : 250mm Depth : 67{ {

WSFLZ150121



High Performance Grade "A"
Light Sensor
Energy-saving and Eco-friendly
Aluminum Structure



RoHS



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE

IIUMINACION SOLAR



COLOUR TEMPERATURE	6000k-6500k 2W
SOLAR PANEL	5X2Y 1.1"
BATTERY TYPE	Lithium-ion 3.7V 2.4AH
CHARGING TIME	1.5 HOURS
DISCHARGING TIME	10-12 HOURS
BEAM ANGLE	360°
MATERIAL	Iron
INSTALLATION HEIGHT	0.6m
NET DIMENSIONS	Height : 600mm Width : 240mm Depth : 240mm

WSGLZ219



Integrated Design
Solar Powered
No Wire Needed
Easy Installation



RoHS



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
ILUMINACION SOLAR



COLOUR TEMPERATURE	6000K-6500K 500W
SOLAR PANEL	6X25Y 400mm
BATTERY TYPE	LiFePO4 3.2V 18AH
CHARGING TIME	10-12H
DISCHARGING TIME	10-12H
LUMEN	1600lm
MATERIAL	Aluminum
INSTALL HEIGHT	4-6m
NET DIMENSIONS	Height : 125mm Width : 550mm Depth : 550mm

WSGLZ50021

Special Designed For
High & Low Temperature Area




- TCS technology ensures longer battery lifespan
- Keep the charging temperature always in -20° -65°



LARGE AREA LIGHTING

Lighting angle 360°, wider illumination range

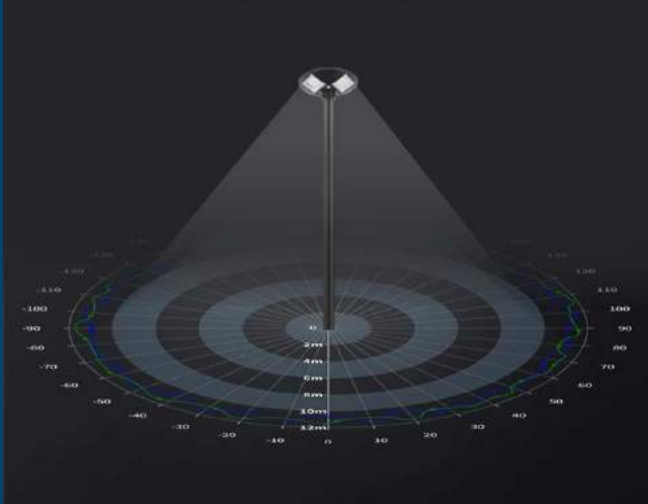

Integrated Design
Solar Powered
No Wire Needed
Easy Installation





WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT


ECLAIRAGE SOLAIRE

IIUMINACION SOLAR



ŠŒŒAMP	6000k-6500k 120W
ŒŒLARŒANEL	18XŒ20Y Œ[]
ŒATTERYŒYPE	LiFePO4 12V 42AH
ŒHARGINGŒIME	Œ Œ Œ []
ŒISCHARGING TIME	30 Œ Œ []
T ATERIAL	Plastic
NET DIMENSIONS	Height : 300mm Width : 102mm Depth : 202[]

WSKIZ20020

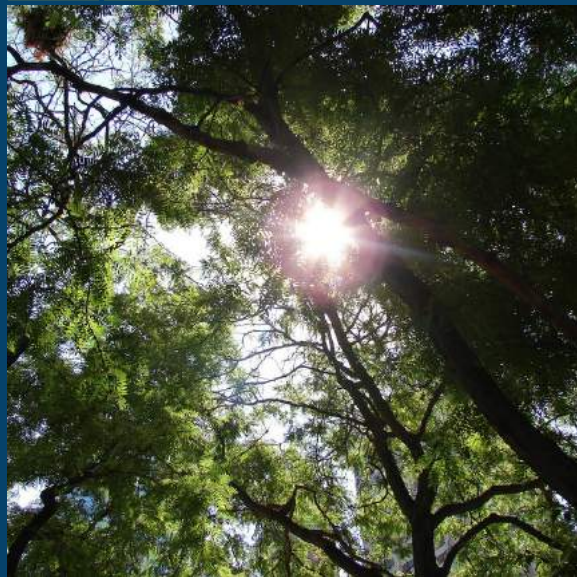

Integrated Design
Solar Powered
No Wire Needed
Easy Installation

CB



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
IIUMINACION SOLAR



ŠÖÖŠAMP	LED 6000k
ÜOLARÁJANEL	18X80Y APoly
ÓATTERYÁYPE	Lead-acid battery 12V 7AH
ÖHARGINGÁIME	1 1/2 1/2 [] •
ÖISCHARGING TIME	3 1/2 1/2 [] •
ŠUMEN	F6 1/2 1/2
T ATERIAL	Iron
NET DIMENSIONS	Height : 126mm Width : 128mm Depth : 220{ }

WSKZ3020



4 LED Bulbs
Energy-saving and Eco-friendly
USB Charging



WESTPOINT®
Create emotions



SOLAR

SOLAR LIGHT

ECLAIRAGE SOLAIRE
IIUMINACION SOLAR



SOLAR FAN	10 Inch
SOLAR PANEL	15X30Y APoly
BATTERY TYPE	Lithium-Ion 11.1X400mAh
CHARGING TIME	2.5H
DISCHARGING TIME	6H
USB OUTPUT	5V 1A
MATERIAL	ABS +Iron
NET DIMENSIONS	420 x 400 x 200mm
AC/DC ADAPTER	OPTION

WDSFZ-1020.DC



Safety Net



360° Rotation



**Wireless solar fan Strong
Wind, Super Cool Direct
current motor 360°
rotation
Safety net**