


W5**NPSSM
DIN 3017****Acton****COLLIER DE SERRAGE BANDE NON PERFOREE
DE 9 MM OU 12 MM**

WORM DRIVE HOSE CLAMPS NON PERFORATED BAND 9 OR 12 MM
 SCHNECKENGEWINDESCHELLEN GEPRÄGTES BAND 9 ODER 12 MM
 ABRAZADERA SIN FIN, CINTA NO PERFORADA DE 9 O 12 MM



d	Code	s	e	l	Cond.	kg/100
8-12	NPSSM9 8-12	7	0,73	9,15	50	1,200
10-16	NPSSM9 10-16	7	0,73	9,15	50	1,300
12-22	NPSSM9 12-22	7	0,73	9,15	50	1,400
16-27	NPSSM9 16-27	7	0,73	9,15	50	1,500
20-32	NPSSM9 20-32	7	0,73	9,15	50	1,600
25-40	NPSSM9 25-40	7	0,73	9,15	25	1,700
30-45	NPSSM9 30-45	7	0,73	9,15	25	1,800
32-50	NPSSM9 32-50	7	0,73	9,15	25	1,900
40-60	NPSSM9 40-60	7	0,73	9,15	25	2,000
50-70	NPSSM9 50-70	7	0,73	9,15	20	2,100
60-80	NPSSM9 60-80	7	0,73	9,15	20	2,300
70-90	NPSSM9 70-90	7	0,73	9,15	10	2,400
80-100	NPSSM9 80-100	7	0,73	9,15	10	2,500
90-110	NPSSM9 90-110	7	0,73	9,15	10	2,700
16-27	NPSSM12 16-27	7	0,73	12,15	25	1,800
20-32	NPSSM12 20-32	7	0,73	12,15	25	1,900
25-40	NPSSM12 25-40	7	0,73	12,15	25	2,000
30-45	NPSSM12 30-45	7	0,73	12,15	25	2,000
32-50	NPSSM12 32-50	7	0,73	12,15	25	2,200
40-60	NPSSM12 40-60	7	0,73	12,15	10	2,500
50-70	NPSSM12 50-70	7	0,73	12,15	10	2,700
60-80	NPSSM12 60-80	7	0,73	12,15	10	3,000
70-90	NPSSM12 70-90	7	0,73	12,15	10	3,200
80-100	NPSSM12 80-100	7	0,73	12,15	10	3,400
90-110	NPSSM12 90-110	7	0,73	12,15	10	3,700
100-120	NPSSM12 100-120	7	0,73	12,15	10	3,900
110-130	NPSSM12 110-130	7	0,73	12,15	10	4,100
120-140	NPSSM12 120-140	7	0,73	12,15	10	4,400
130-150	NPSSM12 130-150	7	0,73	12,15	10	4,600
140-160	NPSSM12 140-160	7	0,73	12,15	10	4,800
150-170	NPSSM12 150-170	7	0,73	12,15	10	5,000
160-180	NPSSM12 160-180	7	0,73	12,15	10	5,200
170-190	NPSSM12 170-190	7	0,73	12,15	10	5,400
180-200	NPSSM12 180-200	7	0,73	12,15	10	5,600

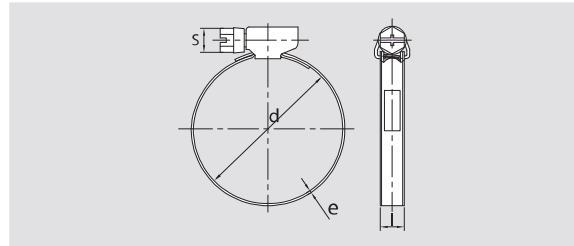

Couple de serrage recommandé / recommended torque :
 9 mm = 4Nm ; 12 mm = 5.5Nm

