


## Standard Duty PVC Layflat Hose

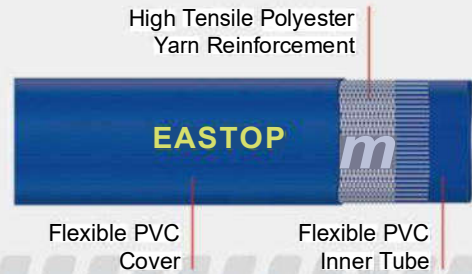

- Flexible, light weight, easy storage
- Tough, economical, general purpose
- Smooth tube provides low friction loss
- UV resistant, longer service life
- Working temperature: -5°C to +65°C

### Application:

Designed for light duty discharge of liquids in agriculture, construction, civil engineering, mining, tank trucks, and water delivery at light working pressures in irrigation systems. Can also be used as jacket for cable or rope protection.

### Specification I

| PRODUCT CODE | ID    |     | OD    | WP  |     | BP  |     | W/A  | COIL |
|--------------|-------|-----|-------|-----|-----|-----|-----|------|------|
|              | inch  | mm  | mm    | bar | psi | bar | psi | g/m  | m    |
| ET-LFHS-020  | 3/4   | 20  | 22.4  | 5   | 60  | 15  | 240 | 100  | 100  |
| ET-LFHS-025  | 1     | 25  | 27.4  | 5   | 60  | 15  | 240 | 140  | 100  |
| ET-LFHS-032  | 1-1/4 | 32  | 34.4  | 5   | 60  | 15  | 240 | 160  | 100  |
| ET-LFHS-038  | 1-1/2 | 38  | 40.2  | 5   | 60  | 15  | 240 | 180  | 100  |
| ET-LFHS-051  | 2     | 51  | 53    | 4   | 60  | 12  | 180 | 220  | 100  |
| ET-LFHS-064  | 2-1/2 | 64  | 66.2  | 4   | 60  | 12  | 180 | 300  | 100  |
| ET-LFHS-076  | 3     | 76  | 78.2  | 4   | 60  | 12  | 180 | 360  | 100  |
| ET-LFHS-102  | 4     | 102 | 104.5 | 4   | 60  | 12  | 180 | 550  | 100  |
| ET-LFHS-127  | 5     | 127 | 129.7 | 4   | 60  | 12  | 180 | 750  | 100  |
| ET-LFHS-153  | 6     | 153 | 155.7 | 3   | 45  | 9   | 135 | 900  | 100  |
| ET-LFHS-203  | 8     | 203 | 207   | 3   | 45  | 9   | 135 | 1600 | 100  |
| ET-LFHS-255  | 10    | 255 | 259.8 | 3   | 45  | 9   | 135 | 2600 | 100  |
| ET-LFHS-305  | 12    | 305 | 309.7 | 2   | 30  | 6   | 90  | 3000 | 100  |
| ET-LFHS-358  | 14    | 358 | 364   | 2   | 30  | 6   | 90  | 5000 | 50   |
| ET-LFHS-408  | 16    | 408 | 414   | 2   | 30  | 6   | 90  | 6000 | 50   |

