

# COMBINATION WRENCHES

## ▼ 40 METRIC AND INCH COMBINATION WRENCH MODULES

### FAST SERIES


#### 40R FAST COMBINATION WRENCH

##### ■ Ratchet effect


- Open-end configuration for fast rewind.
- Torque transmission through flats for increased power.
- OGV® ring for maximum loosening power.

##### ■ 3 drive surfaces for greater power from more wrench-to-nut contact points.


- Reduced risk of fastener wear.
- Reduced risk of wrench slippage.




Firm pressure on fastener flat.




Rewind action without removing the tool.

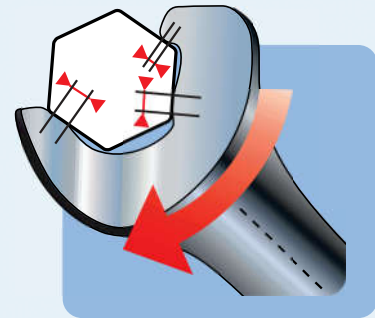

##### ■ Easier positioning and withdrawal..

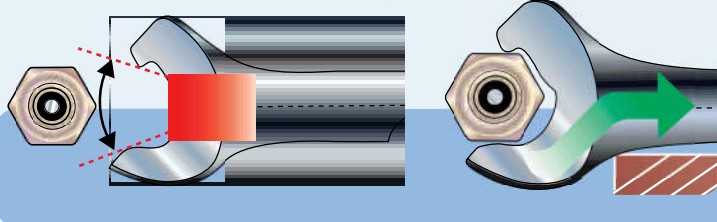

##### ■ Twice as fast as a conventional open-end wrench.



#### ▼ 40R METRIC FAST COMBINATION WRENCHES

▷ ISO 7738

- Metric sizes from 8 to 24 mm.
- 12-point OGV®ring angled at 15°.
- Satin chrome finish.

Wrench	A	B	B'	C	C'	L	ΔΔ
	mm	mm	mm	mm	mm	mm	g
40R.8	8	18,5	12,9	4,3	6,0	126	26
40R.9	9	20,5	14,0	4,3	6,1	133	29
40R.10	10	22,9	15,9	4,8	6,6	141	39
40R.11	11	24,9	17,0	5,1	7,0	148	45
40R.12	12	26,8	18,4	5,3	7,5	157	56
40R.13	13	28,8	19,8	5,6	8,0	165	61
40R.14	14	30,6	21,2	6,0	8,5	172	73
40R.15	15	32,0	22,4	6,6	9,2	179	79
40R.16	16	34,8	23,8	6,9	9,8	187	93
40R.17	17	36,7	25,0	7,0	10,3	193	113
40R.18	18	38,5	26,4	7,4	10,9	201	120
40R.19	19	40,9	29,4	7,6	11,3	209	140
40R.20	20	42,5	29,4	8,0	11,6	217	165
40R.21	21	45,0	30,7	8,1	11,9	223	182
40R.22	22	47,0	32,0	8,2	12,3	240	205
40R.23	23	48,5	33,4	8,4	12,6	250	236
40R.24	24	50,5	34,7	8,5	12,9	260	260

