


89 - Clés mâles courtes Torx®

Description

- Conformes aux spécifications Torx®
- Présentation : brunie

Normes & certifications : ISO 2936

Dessin technique

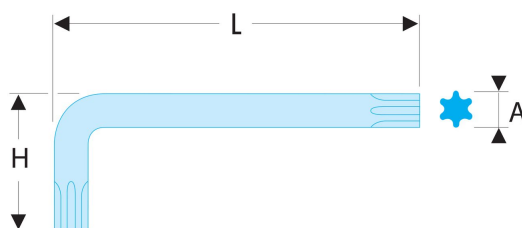

		A (mm)	H (mm)
89.6	[89.6] Clé mâle courte TORX®, 6 mm	1.650	18.00
89.7	[89.7] Clé mâle courte TORX®, 7 mm	1.97	18.00
89.8	[89.8] Clé mâle courte TORX®, 8 mm	2.30	18.00
89.9	[89.9] Clé mâle courte TORX®, 9 mm	2.48	19.50
89.10	[89.10] Clé mâle courte TORX®, 10 mm	2.720	19.50
89.15	[89.15] Clé mâle courte TORX®, 15 mm	3.260	21.50
89.20	[89.20] Clé mâle courte TORX®, 20 mm	3.840	24.00
89.25	[89.25] Clé mâle courte TORX®, 25 mm	4.40	25.50
89.27	[89.27] Clé mâle courte TORX®, 27 mm	4.96	27.00
89.30	[89.30] Clé mâle courte TORX®, 30 mm	5.490	30.00
89.40	[89.40] Clé mâle courte TORX®, 40 mm	6.60	34.00
89.45	[89.45] Clé mâle courte TORX®, 45 mm	7.70	37.00
89.50	[89.50] Clé mâle courte TORX®, 50 mm	8.790	41.00
89.55	[89.55] Clé mâle courte TORX®, 55 mm	11.170	48.00