


Inox A2

62432

DIN 7504 O - (similar ISO 15482)

VIS AUTOPERCEUSES TETE FRAISEE POZIDRIVE

POZIDRIVE COUNTERSUNK HEAD SELF DRILLING SCREWS
 BOHRSCHRAUBEN MIT SENKKOPF UND KREUZSCHLITZ Z
 TORNILLOS AUTOTALADRANTES CABEZA AVELLANADA POZIDRIVE

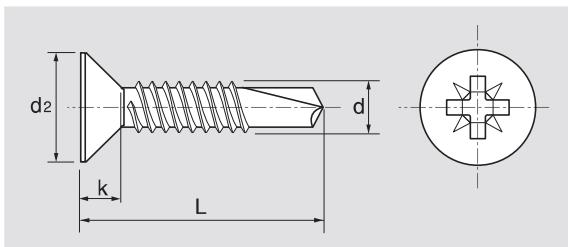

d	3,5 (6)	3,9 (7)	4,2 (8)	4,8 (10)
d2	6,8	7,5	8,1	9,5
k	2,1	2,3	2,5	3
+	2	2	2	2
Capacité de perçage	2	2	3	4

d x L	Code	Cond.	kg/100	d x L	Code	Cond.	kg/100
3,5X13	624323,5X13	200	0,073	4,2X22	624324,2X22	200	0,164
3,5X16	624323,5X16	200	0,085	4,2X25	624324,2X25	200	0,183
3,5X19	624323,5X19	200	0,098	4,2X32	624324,2X32	200	0,249
3,5X25	624323,5X25	200	0,124	4,2X38	624324,2X38	200	0,264
3,9X13	624323,9X13	200	0,095	4,8X16	624324,8X16	200	0,163
3,9X16	624323,9X16	200	0,117	4,8X19	624324,8X19	200	0,187
3,9X19	624323,9X19	200	0,139	4,8X25	624324,8X25	200	0,237
3,9X25	624323,9X25	200	0,171	4,8X32	624324,8X32	200	0,333
3,9X32	624323,9X32	200	0,198	4,8X38	624324,8X38	200	0,344
3,9X38	624323,9X38	200	0,264	4,8X45	624324,8X45	200	0,401
4,2X13	624324,2X13	200	0,108	4,8X50	624324,8X50	200	0,442
4,2X16	624324,2X16	200	0,127	4,8X60	624324,8X60	200	0,450
4,2X19	624324,2X19	200	0,146				



Perce seulement l'aluminium / Drills only aluminium
 Informations d'utilisation voir page 43 / Using instructions : see page 43