


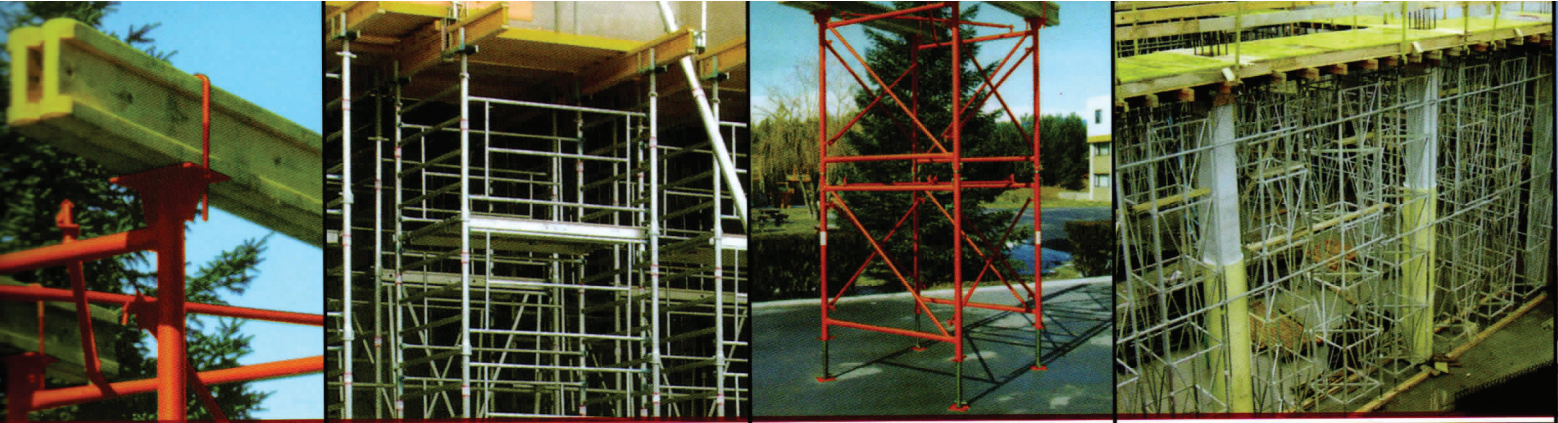

Charge d'utilisation

RÉF.	DÉVELOPPEMENT mm		CHARGE EN TONNE (selon hauteur en mm) LOAD IN TONS (according to height in mm)							
	MINI	MAXI								
	Hauteur mm Height		1750	2000	2500	3000	3500	4000	4500	5000
SNE 300	1700	3000	1,44	1,35	1,17	1				
SNE 350	2000	3500		1,44	1,26	1,08	0,72			
SNE 400	2200	4000			1,44	1,17	0,81	0,54		
SNE 450	2500	4500			1,26	1	0,72	0,54	0,36	
SNE 500	2800	5000				1,26	0,9	0,63	0,45	0,27

Données techniques :

Fût ø55 mm

Coulisse ø48,3 mm

Ecrou acier mécano- soudé

Rondelle d'appui bombée

Platine 110 x 110 x 4

(Trou central ø40 + 4 trou de fixation)

Broche imperdable ø12mm

Garde à la main

Peinture antirouille

Technical specifications

Outer tube ø55 mm

Inner tube with holes ø48,3 mm

Prop thread

Washer

Steel square base plate 110 x 110 x 4

(Central hole ø40 + 4 fixing holes)

Steel Hook ø12mm

Hand rail

Antirust painting

